



Dynamic Charge Acceptance, Start it, Power it, 12v Non-Spillable

AGMBF4DXHD

Deep Cycle Sealed Maintenance-Free AGM Battery (GRP-4D)


CRANKING PERFORMANCE	
CA 32°F	CCA 0°F
1500	1300

RESERVE CAPACITY	
@25 AMPS	@75 AMPS
400 Minutes	100 Minutes

CONSTANT CURRENT DISCHARGE (Amps)												
CUT OFF VOLTAGE V _{ce} 電圧	15M	30M	45M	1H	2H	3H	5H	8H	10H	12H	20H	24H
1.75V	261	167	123	103	55,1	40,8	28,8	19,6	16,2	13,9	10,0	8,6

SPECIFICATIONS	
Nominal Voltage	12 Volt
Rated Capacity (20 hour rate)	200 AH
Dimensions	Total Height (including terminals) 239 mm (9.41")
	Height 214 mm (8.43")
	Length 530 mm (20.87")
	Width 209 mm (8.23")
Weight 55.7 kg (122.8 lbs)	

CHARACTERISTICS		
Capacity 77°F (25°C)	20 Hour Rate (1.75A to 10.5 Volts)	200AH
	10 Hour Rate (16.2A to 10.2 Volts)	162AH
	5 Hour Rate (28.8A to 10.2 Volts)	144AH
Internal Resistance	Full charged Battery 77°F (25°C)	4m Ω
	104°F (40°C)	102%
Capacity Affected by Temperature (20 Hour Rate)	77°F (25°C)	100%
	32°F (0°C)	85%
	5°F (-15°C)	65%
	Capacity after 3 month storage	91%
Self-Discharge 77°F(25°C)	Capacity after 6 month storage	82%
	Capacity after 12 month storage	64%
Max. Discharge Current 77°F (25°C)		2000A (5s)
Terminal	Standard	L (Flag)
Charging (Constant Voltage)	Cycle	Initial Charging Current $\leq 0.2 \times C20$ 13.9 V ~ 14.2 V/77°F (25°C)
	Float	13.3 V ~ 13.5 V/77°F (25°C)

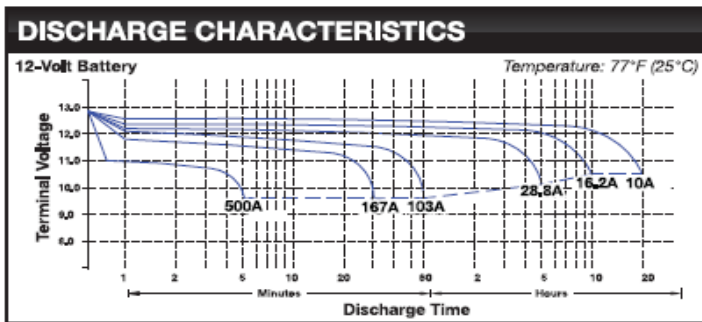

SIZE & DETAILED ILLUSTRATION	
	Terminal: L (Flag) (unit: mm)